


NTG-2

Directional Condenser Microphone

AUSTRALIA
107 Carnarvon st, Silverwater NSW 2128 Australia
Ph: +61 2 9648 5855 Fx: +61 2 9648 2455

USA
PO Box 91028, Long Beach CA 90809-1028
Ph: +1 562 364 7400 Fax: +1 888 412 4664

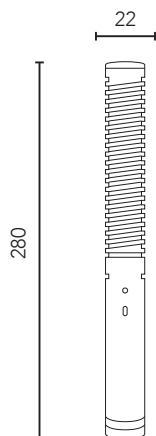

Incl. Accessories

- WSVM wind shield
- ZP2 zip pouch
- RM5 mic clip


Features

- Broadcast sound quality
- Low noise circuitry
- Condenser transducer
- Rugged metal construction
- Two step High Pass Filter (Flat/80Hz)
- P48 phantom power or 1.5V AA battery option
- Low handling noise
- Low weight - 161g (5.17 oz.)
- Designed and manufactured in Australia
- Full 10 year warranty with online registration


Specifications

Acoustic Principle	Line Gradient
Directional Pattern	Super-Cardioid
Frequency Range	20Hz ~ 20,000Hz (selectable HPF@80Hz)
Sensitivity	-36dB \pm 2dB re 1V/Pa @ 1kHz
Nominal Impedance	250 Ω - phantom power 350 Ω - battery power
Equivalent Noise	18dBA SPL (A - weighted per IEC651)
Maximum Output	+6.9dBu (@ 1% THD into 1k Ω)
Dynamic Range	113dB (per IEC651)
Maximum SPL	131dB (@ 1kHz, 1% THD into 1k Ω load)
Signal/Noise	76dB SPL (A - weighted per IEC651)
Power Req.	48V Phantom Power or 1.5 AA battery
Dimensions	Length - 280mm Diameter - 22mm
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)
Net Weight	161g

Polar Pattern



Frequency Response

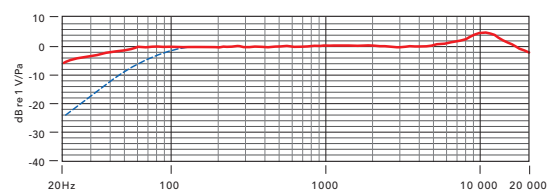

RØDE
MICROPHONES